



Installation Instructions

Netting for JK 2 door 2007-up
DD-N-JK2-07R
J2NN07RC**

-Thank you for purchasing a Dirtydog 4x4 netting system. Please read these instructions fully to familiarize yourself with the installation. You should have 3 main pieces. Right side, left side, and backside. Set aside 60 minutes for the first time you install your netting. Installation is done easiest with the hard top removed. The soft top can be opened or closed.


Start with either side. There is a buckle attached to one corner. This buckle goes to the bottom back corner. Attach the first strap at the top behind the front seat. See photo for positioning.



Attach the strap at the back next. Continue with the balance of the straps on both roll bars adjusting the straps evenly. The bottom one with the buckle attaches later on to the rear. Do the same for the opposite side.





The four straps at the top of each side will connect to the top piece after you have installed the overhead piece.

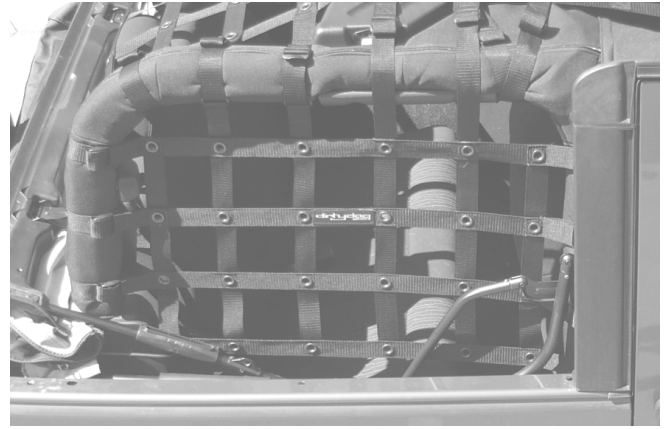

The next step is to install the back side. Start at the back and install the 8 buckles. Once all 8 are snapped in adjust the tension so the net is centered and evenly spaced.



Slide each half of the tailgate bar in the last row as shown in the photo. This bar will connect at the center of the net and then the whole bar is clipped into soft-top tailgate clips. (Clips can be purchased from us or your local dealer.) This last row is optional and can be cut off if not needed.

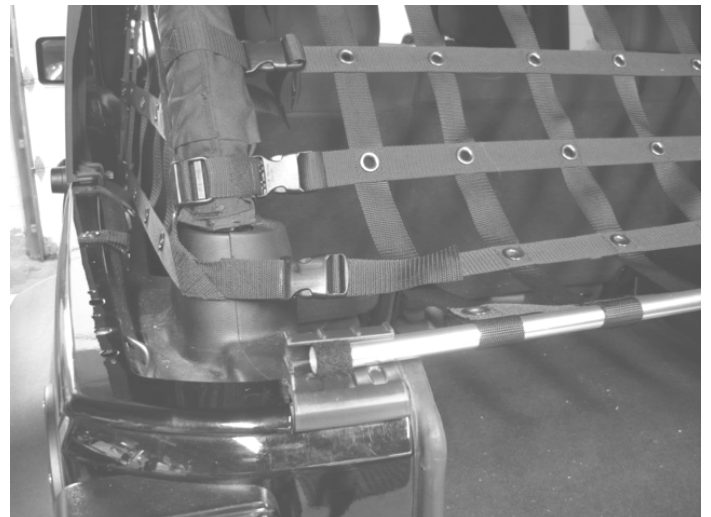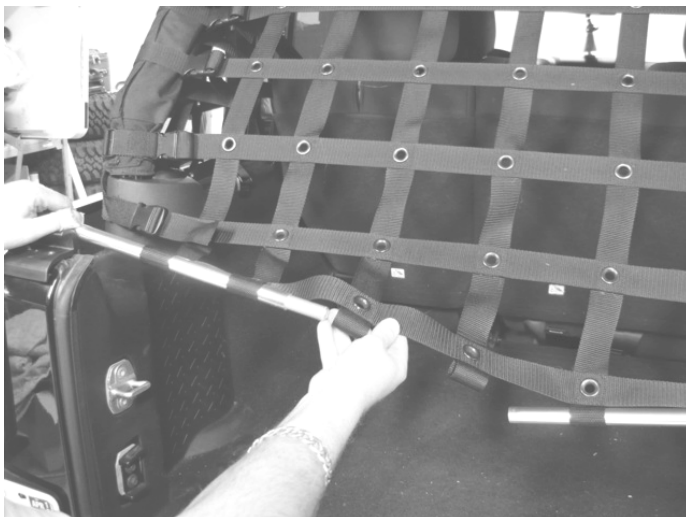

* unlimited model shown in photo

Attach the balance of the straps along the top of the roll bars. The two straps with loops on the side pieces get connected with the straps on the overhead piece.






The final straps at the front corners wraps over the speaker bar. Wrap the long strap around over the front of the speaker/roll bar and bring under and around up the side and feed into the ladderloc. There will be two ladderlocs. The second one is used for the side strap.



Adjust and tighten straps as needed to even out the net so it is positioned properly. Your net comes with a one year warranty against manufacturing defects. Cuts, abrasions, sun faded items are not covered under the warranty.

Dirtydog 4x4
6-2045 Dundas Road
Mississauga, ON L4X 1M6
1-855-704-0708
Question? Call or email orderdesk@dirtydog4x4.com

Contents

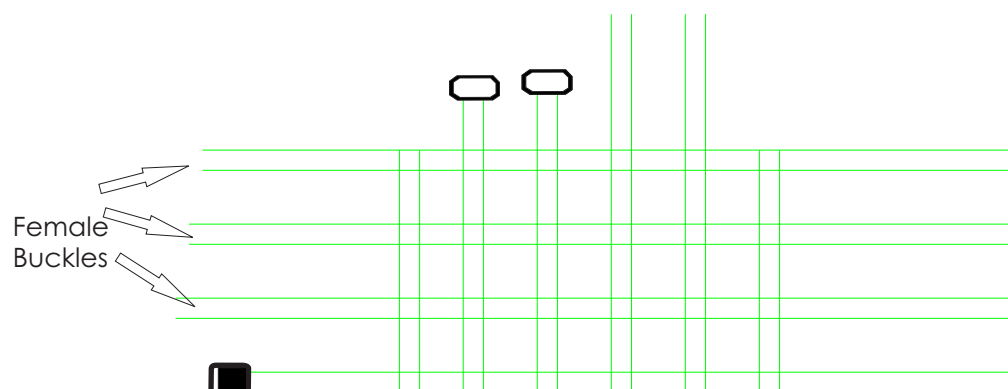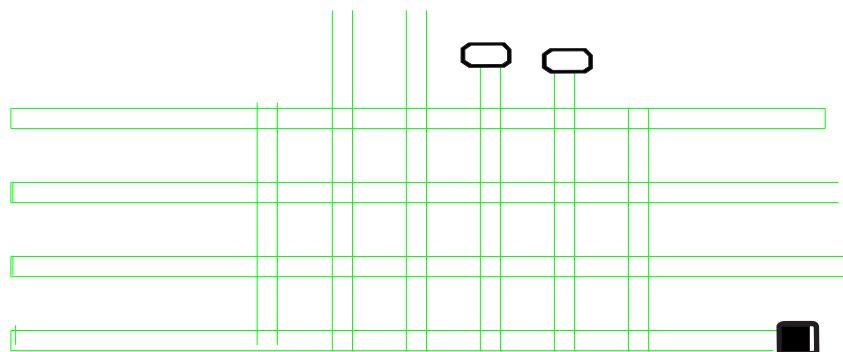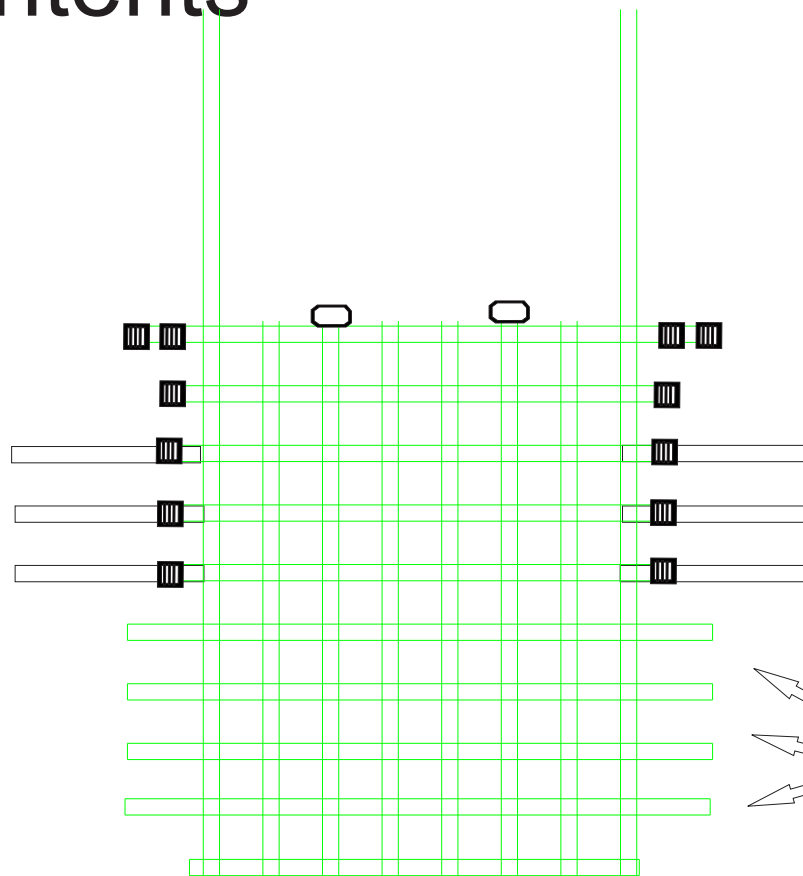

Female Buckles