



# Installation Instructions


Pet divider (front) for JK 2007-up

DD-P-JKF-07


J4PD07F1

-Thank you for purchasing a Dirtydog 4x4 netting system. Please read these instructions fully to familiarize yourself with the installation. Set aside 15 minutes for the first time you install your pet divider.

In order to position the net properly. The dirtydog logo faces forward. There are 2 long straps at the top that wrap over the roll bar and connect to the ladderloc sewn onto the net.Center them and snug them up.

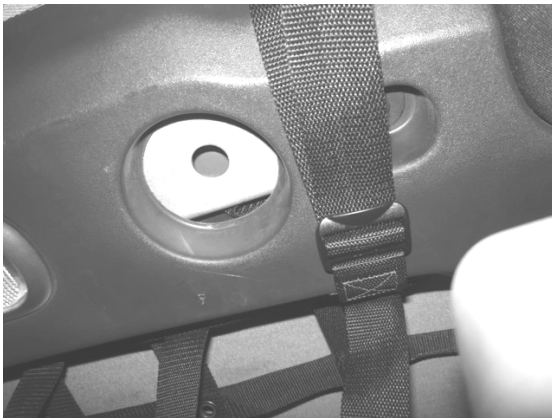

The two straps that run out horizontally at the top go over top the roll bar and come out around the side. These connect into the cam buckles on the net. (see Photo). Tighten up both sides and position the net so everything is centered and hanging evenly.

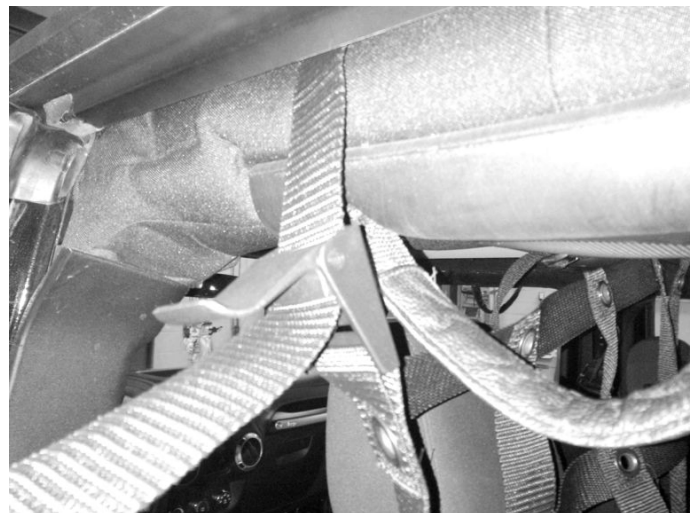

The long straps at the bottom pull down and wrap underneath the front seat seat brackets as shown. The JK and JKU have different style seat brackets. As seen in the two photos. The straps come back up and connect into the lower Cam buckle.



On the 4 dr unlimited wrap the strap around the inside seat bracket first and then to the outside foot and back upto the net



On the 2 dr wrangler you will have to reach a little further under the seat to feed the strap underneath as shown



The final step is to attach it to outside ladderloc hanging off the bottom of the net



Adjust and tighten straps as needed to even out the net so it is positioned properly. Your pet divider comes with a three year warranty against manufacturing defects. Cuts, abrasions, sun faded items are not covered under the warranty.

Dirtydog 4x4  
6-2045 Dundas ST. E.  
Mississauga, ON  
Canada

1-855-704-0708

Question? Call or email [orderdesk@dirtydog4x4.com](mailto:orderdesk@dirtydog4x4.com)