





Installation Instructions

JEEP JL UNLIMITED PET DIVIDER 2018
JL4PD18F
FITS MODEL YEAR 2018

Thank you for purchasing a Dirtydog 4x4 pet divider. Please read these instructions fully to familiarize yourself with the installation. Set aside 20 minutes for the first time you install your pet divider. 10 MM wrench required for installation.

Step 1: Slide the steel bar into the top row of loops of the pet divider and install the shock cord hooks on the bottom by pushing the shock cord through the grommet and loop it back on itself.

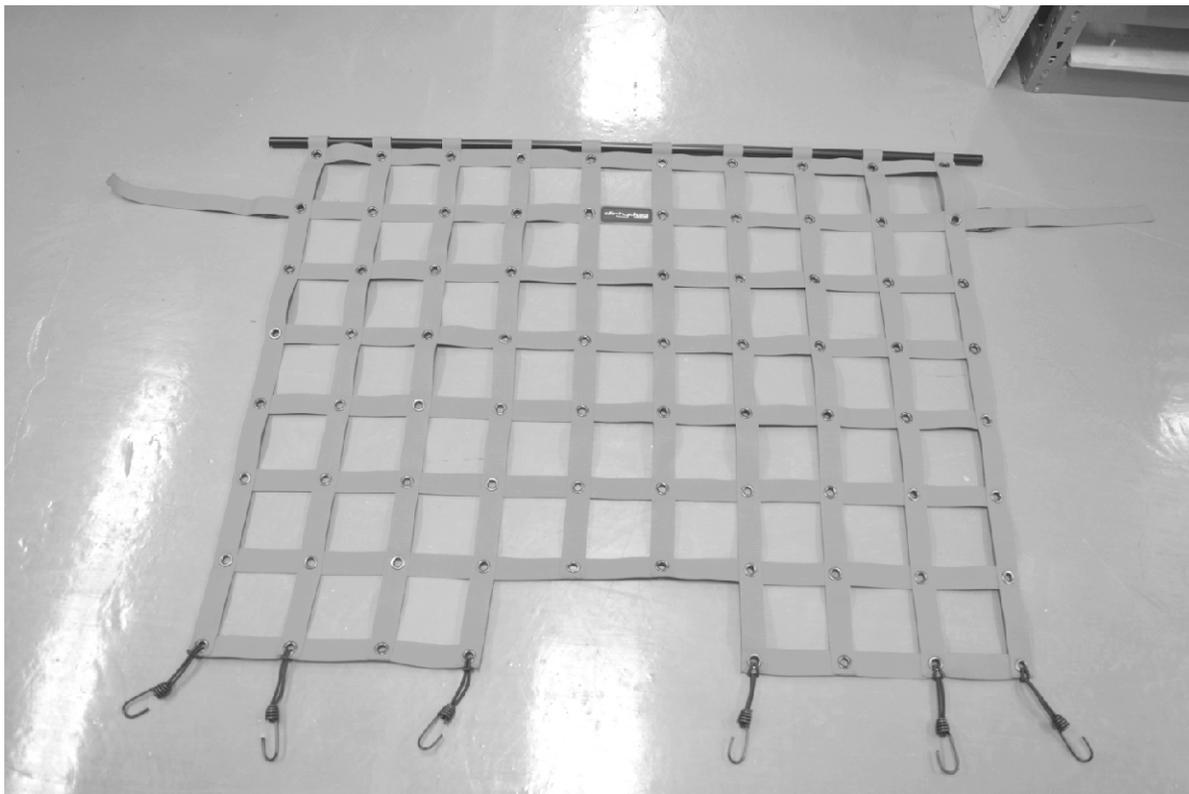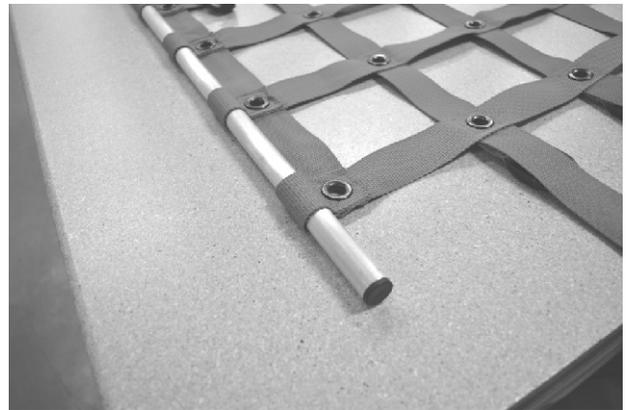

SOFT TOP INSTALLATION. FOR HARD TOP INSTALLATION SEE NEXT PAGE.

Mount the hanger loops with the silver grommet onto the roll bar as shown loosen and remove the factory bolt holding the soft top rail in place. Slide the hanger between roll bar and soft top bracket and retighten bolt.



Hard top installation

We have removed the hard top in order to show the installation. Removal is not required for installation. Install the pet divider hanger using the nuts, bolts, and washer provided. The bolt installs from the bottom of the roll bar. You will be able to feel with your hand as it comes through the top of the roll bar. Hold in place and install the shoulder washer first. The shoulder faces down and drops into the hole. The acorn nut can now be installed and tightened. *****WARNING DO NOT INSTALL THE ACORN NUT WITHOUT THE WASHER IN FIRST. THE NUT WILL DROP THROUGH THE HOLE AND WILL BE UNRETRIEVABLE*****



Top view

Install the bar ends through the loops you just mounted on the roll bar



Attach the side straps to the grab handles at the doors as shown. Tighten equally on both sides. Your pet divider is now installed.



The shock cord hooks connect to the seat bracket at the bottom of the front seats as shown.



Dirtydog 4x4
2025 Dundas St. E.
Mississauga, ON
Canada
855-704-0708
Question? Call or email orderdesk@dirtydog4x4.com