



Installation Instructions

DD-N-TJ96-R

Netting for Jeep TJ 1997 to 06 all models except for LJ long base T2NN97RC**

VIDEO INSTALLATION INSTRUCTIONS AVAILABLE AT:
WWW.DIRTYDOG4X4.COM

-Thank you for purchasing a Dirtydog 4x4 netting system. Please read these instructions fully to familiarize yourself with the installation. You should have 3 main pieces. Right side, left side, and backside. Set aside 40 minutes for the first time you install your netting. Installation is done easiest with the hard top removed. The soft top can be opened or closed.

Start with either side. each side is identified as left or right. Loosely install nine straps (5 in the front 4 in the rear).


The straps toward the rear need to have one half of the buckle inserted on them. (See diagram on last page). Tighten all the straps so netting is equally spaced and straight. Repeat the same procedure for the opposite side.



Rear section installation. Start at the back with the rear buckles. Attach all ten. Tighten and adjust as necessary. Finish by installing the balance of the straps along the top. There are 3 more straps at the top that install on the roll bar



The last strap at the very top wraps around the roll bar and comes out the side to attach to the buckle off the side

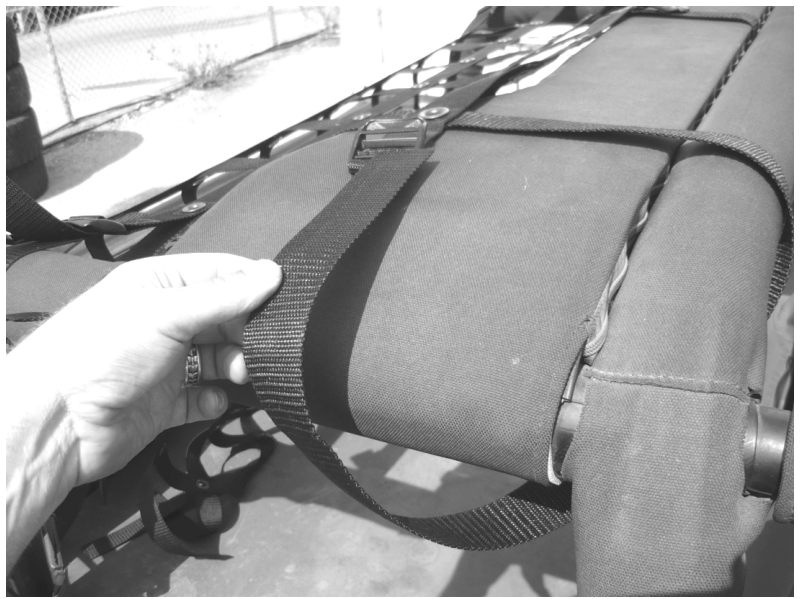



Your net comes with a 3 year warranty against manufacturing defects. Cuts, abrasions, sun faded items are not covered under the warranty.

Dirtydog 4x4
2045 Dundas St. E.
Mississauga, ON
Canada
855-704-0708
Question? Call or email orderdesk@dirtydog4x4.com



1997 -2006 Jeep TJ

Contents

